



A Hands-on PSOA RuleML Tutorial

Relationship & Framepoint Facts and Rules

Theodoros Mitsikas
National Technical University of Athens | RuleML
mitsikas[AT]central[DOT]ntua[DOT]gr

4th International Joint Conference on Rules and Reasoning,
Virtual, June 29th - July 1st, 2020

Updated on: September 7th, 2020

Available at: <http://ruleml.org/talks/TheodorosMitsikas-PSOARuleMLTutorial-RuleMLRR2020.pdf>

Upgraded from: 2nd Workshop on Rules: Logic and Applications ([RulesLogApps 2019](#))



PSOA RuleML


- A **graph/object-relational** Web rule language for asserting plus querying **node/object**-describing *key-value pairs* and **relational**-style table rows in a uniform manner: generalizes Knowledge Graphs to PSOA KGs
[\(\[http://wiki.ruleml.org/index.php/PSOA KGs: RuleML Technical Group on PSOA Knowledge Graphs\]\(http://wiki.ruleml.org/index.php/PSOA_KGs:RuleML_Technical_Group_on_PSOA_Knowledge_Graphs\)\)](http://wiki.ruleml.org/index.php/PSOA_KGs:RuleML_Technical_Group_on_PSOA_Knowledge_Graphs)
- Integrates spectrum of atomic formulas (atoms), arriving at F-logic-like **framepoints** from Prolog-like **relationships**, with blended ones in between, in a systematics of **positional-slotted object-applicative** (psoa) atoms
- Use cases of Knowledge Bases (KBs):
 - [Port Clearance Rules](#), [Medical Devices Rules](#), [Air Traffic Control KB](#), ...

Relationships: From English & RCL to Visualization (Grailog)

English: “A purchase involving John, Mary, and Fido”

RCL (RuleML Controlled Language): “a purchase of John, Mary, thru Fido”

Grailog (1 directed hyperarc applying predicate to 3-argument tuple):

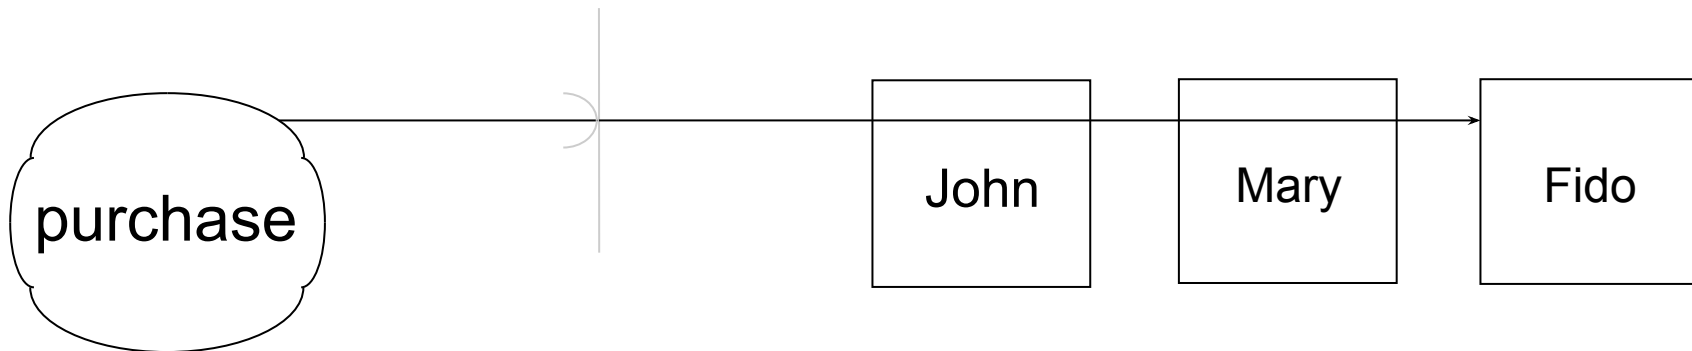



Relationships: Oidless, Single-Tupled, Dependent Atoms

`purchase(John Mary Fido)`

PSOA RuleML

`purchase(john,mary,fido)`

Prolog

PSOA RuleML:

- Predicate arguments are separated by whitespace, not commas
- `John`, ... are individual constants (variables denoted by "?" prefix)
 - constants also include numbers, strings, Internationalized Resource Identifiers (IRIs), and `Top` (the root of the predicate hierarchy)



Relationships: Oidless, Single-Tupled, Dependent Atoms

`purchase(John Mary Fido)`

PSOA RuleML

- we don't need to provide an Object Identifier (OID)
- the order of the arguments matters in one (implicit) n-tuple
- used for n-ary relationships (here: $n=3$)
- the argument tuple of a relationship is predicate-dependent (predicate-scope-sensitive)
- this talk focuses function-free (Datalog-like) expressiveness



(Fact-retrieving) Queries

Ground queries (no variables):

```
purchase(John Mary Fido)      % Yes
```

Non-ground queries (at least one "?" variable, bound to "_" -prefixed explicit local constants):

```
purchase(?b ?s ?i) % ?b=_John ?s=_Mary ?i=_Fido
```


```
purchase(?b ?s)      % No (there can be no bindings)
```

```
?p(John Mary Fido) % ?p=_purchase (predicate variable)
```

Framepoints: From Engl.-like RCL to Visualization (Grailog)

“transaction200, a purchase with buyer John, seller Mary, plus item Fido”

Grailog (OID with 3 slot-name-labeled arcs and 1 "has element" arc):

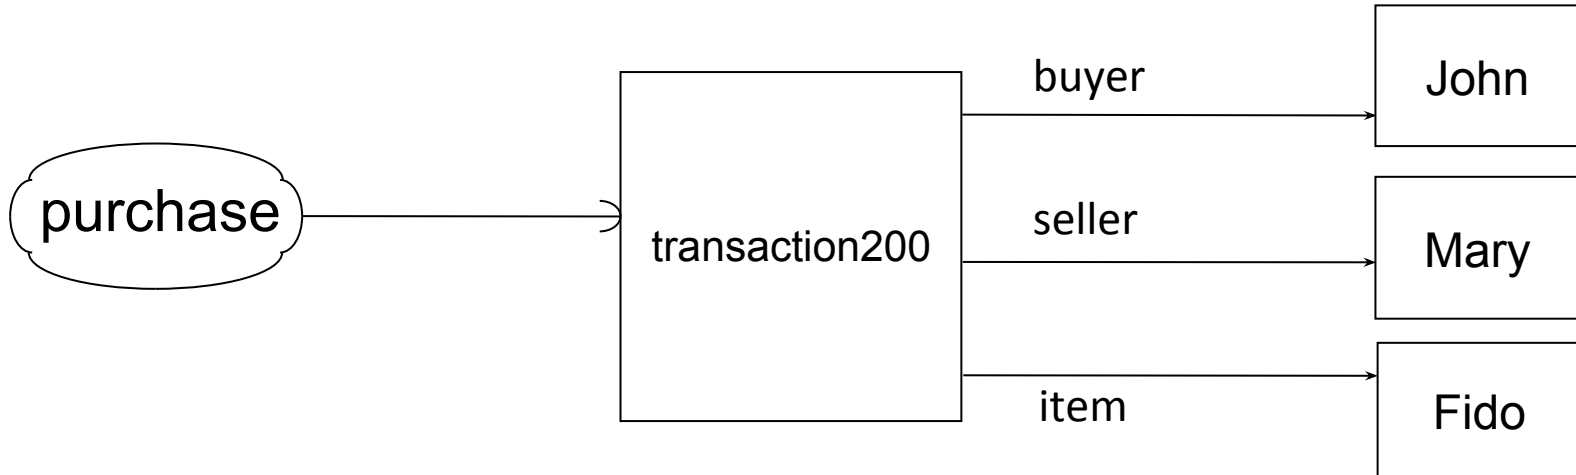




Framepoints: Oidful, Slotted, Independent Atoms

```
transaction200#purchase (buyer->John  
                          seller->Mary  
                          item->Fido)
```

- hash infix, "#", types the Object Identifier (OID) `transaction200` with its predicate (i.e., indicates membership of `transaction200` in `purchase`)
- uses slot names ('explicit roles') `buyer`, `seller`, and `item`
- independent-arrow infix, "->", pairs a predicate-independent slot name with its filler
- ordering between slots does not matter
- framepoint atoms build a Directed Labeled Graph with predicate-typed nodes

Atoms Blending Relationships and Framepoints: From Keyword (RCL) to Visual (Grailog) Syntax

“transaction300, a purchase of John thru Mary, with item Fido”

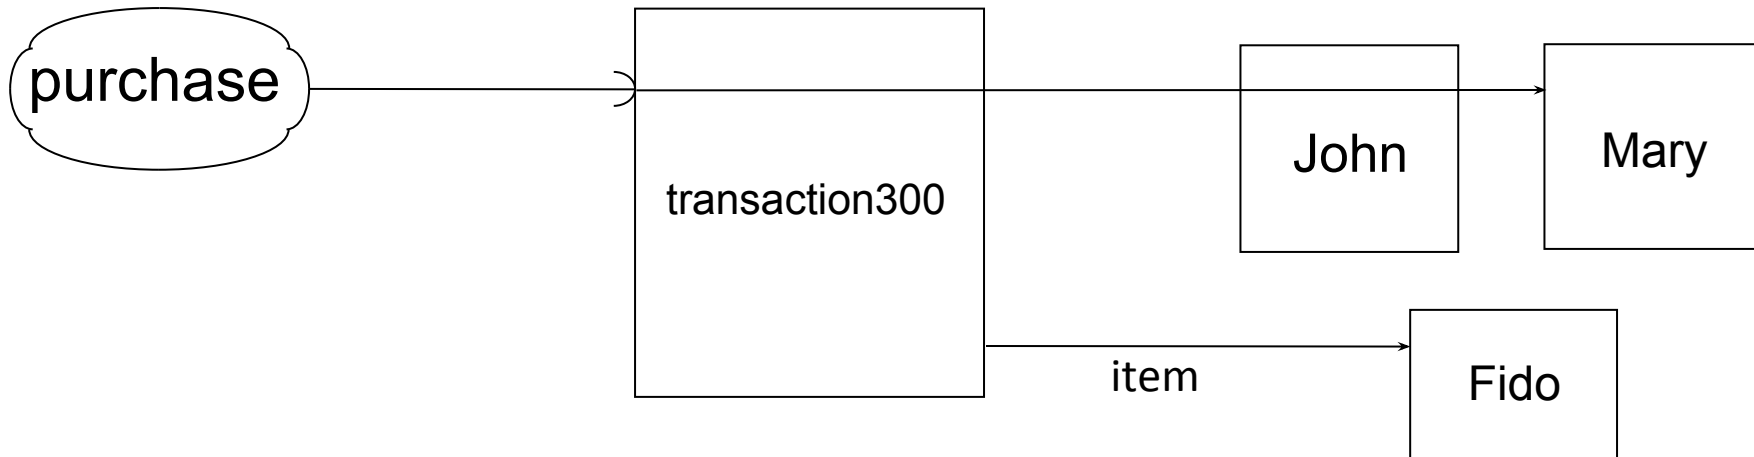



Tuple/Slot-combining PSOA Atoms in Systematics from Relationships to Framepoints

The blended atom

```
transaction300#purchase(John Mary item->Fido)
```

is *oidful* (`transaction300`) as well as *dependently tupled* (`John Mary`) and *independently slotted* (`item->Fido`)



(Ground) Rule over Relationships

"John is liable for Fido if John purchases Fido from Mary"

```
liability(John Fido) :-  
    purchase(John Mary Fido)
```

As in Prolog, the " :-" (read: "if") indicates rules



(Non-ground) Rule over Relationships

"A buyer is liable for an item if the buyer purchases the item from a seller"

```
forall ?b ?s ?i (  
    liability(?b ?i) :-  
        purchase(?b ?s ?i)  
)
```



Hybrid Rule over Relationships and Framepoints

Non-ground relationship-conclusion framepoint-condition rule:

```
forall ?b ?s ?i ?t (  
  liability(?b ?i) :-  
    ?t#purchase (buyer->?b  
                 seller->?s  
                 item->?i)    )
```



Rule over Framepoints with Coupled OIDs

```
forall ?b ?s ?i ?t (  
  liabilityID(?t) #liability (bearer->?b  
                               item->?i) :-  
    ?t#purchase (buyer->?b  
                 seller->?s  
                 item->?i)  
)
```



(Rule-applying) Oidless/Oidful Queries

```
% KB 15
transaction200#purchase(
    buyer->John seller->Mary item->Fido)

forall ?b ?s ?i ?t (
    liabilityID(?t)#liability(bearer->?b item->?i) :-
        ?t#purchase(buyer->?b seller->?s
                    item->?i)
)
```

```
liability(bearer->?b item->?i) % ?b=_John ?i=_Fido
```

```
?o#liability(bearer->?b item->?i)
```

← % Extra binding: ?o=_liabilityID(_transaction200)



Explore More Oidful Queries

```
% KB 16
transaction200#purchase(
    buyer->John seller->Mary item->Fido)

forall ?b ?s ?i ?t (
    liabilityID(?t)#liability(bearer->?b item->?i) :-
        ?t#purchase(buyer->?b seller->?s
                    item->?i)
)
```

```
transaction200#purchase(buyer->?b seller->?s) % ?b=_John ?s=_Mary
transaction200#Top(buyer->?b) % ?b=_John
transaction200#purchase % Yes
liabilityID(?t)#liability(?r->John) % ?r=_bearer ?t=_transaction200
Or( ?t#purchase(buyer->Theodore) ?t#purchase(buyer->John) )
%?t=_transaction200
```




Live Demo

- Using PSOATransRun: the reference PSOA RuleML reasoner
- PSOATransRun translates graph/object-relational KBs and queries from PSOA RuleML presentation syntax to relational languages
- Available online: <https://psodemo-chatty-cat.eu-gb.mybluemix.net>
 - 'ready-to-use' demo version translating to TPTP
- Available for download: http://wiki.ruleml.org/index.php/PSOA_RuleML#Prolog_Instantiation
 - runtime options allow to see, e.g., the TPTP or Prolog translation results!



Some Advanced Features of PSOA RuleML and PSOATransRun

- Built-ins and libraries for math & physics predicates/functions
- Dependent slots (e.g., `item+>Fido`) as well as explicit dependent and independent tuples (`+ [. . .]` and `- [. . .]`)
- Subpredicates (e.g., `bargain##purchase`)
- Embedded (oidless/oidful) atoms
- RDF import (N3/Turtle)
- Negation-as-failure (Naf)



Further Reading

PSOA RuleML Wiki page:

- [http://wiki.ruleml.org/index.php/PSOA RuleML#Presentation Preview](http://wiki.ruleml.org/index.php/PSOA_RuleML#Presentation_Preview)
- [http://wiki.ruleml.org/index.php/PSOA RuleML#Examples](http://wiki.ruleml.org/index.php/PSOA_RuleML#Examples)
- [http://wiki.ruleml.org/index.php/PSOA RuleML#References](http://wiki.ruleml.org/index.php/PSOA_RuleML#References)

Learn PSOA RuleML - a resource page on PSOA syntax, (query) semantics, and tools: <http://psoa.ruleml.org/learn>



Join the Open-source Project

- Develop use cases

wiki.ruleml.org/index.php/PSOA_RuleML#Use_Cases

- Contribute to PSOATransRun development

wiki.ruleml.org/index.php/PSOATransRun_Development_Agenda

